

Portable Fire Extinguishers

Dry Chemical ABC and Clean Agent BC



FIREBOY Portable Extinguishers UL Approved and ABC Rated

- ▶ Commercial
- ▶ Industrial
- ▶ Land Based
- ▶ Vehicles and Trucks
- ▶ Marine

FIREBOY PORTABLE EXTINGUISHERS ARE UL APPROVED AND ABC RATED

Fireboy-Xintex portable dry chemical fire extinguishers are UL approved, ABC rated (*wood, paper, fuel, chemical and electrical*) and include accessories as listed.

The extinguishers are heavy-duty with a steel cylinder, metal valve, and pressure gauge. All models are also rechargeable. The 5.5, 10 and 20 lb models also include a wall hook ring and a hose with hose strap. A heavy-duty USCG approved marine / vehicle bracket for mounting an extinguisher in a boat or motor vehicle is included with the 2.5 and 5.5 lb (VM) models. A heavy duty marine / vehicle bracket is also available for the 10 and 20 lb models.

PORTABLE EXTINGUISHER FEATURES

	2.5 LBS (1.13 KG)	5.5 LBS (2.49 KG)	10 LBS (4.53 KG)	20 LBS (9.07 KG)
Wall Hook Ring	N/A	X	X	X
Wall Hook	N/A	Specify "WH"	X	X
Marine / Vehicle Bracket	Standard	Specify "VM"	Optional Buy Separately	Optional Buy Separately
Hose Strap	N/A	Standard with "WH"	Standard	Standard

SAFETY



A Darley Company



FIREBOY-XINTEX.COM
Grand Rapids, Michigan / Poole, England

PORTABLE EXTINGUISHERS


UL APPROVED AND ABC RATED

FIREBOY-XINTEX PORTABLE EXTINGUISHER SPECIFICATIONS					
	2.5 LBS (1.13 KG)	5.5 LBS (2.5 KG)		10 LBS (4.54 KG)	20 LBS (9.09 KG)
F-X PART NUMBER	FB02.51A10BC-VM FB02.51A10BC-M	FB05.53A40BC-WH	FB05.53A40BC-VM	FB10.04A60BC-WH	FB20.06A80BC-WH
Agent Weight - lbs (kgs)	2.5 (1.13)	5.5 (2.5)		10 (4.54)	20 (9.09)
Agent	Monoammonium Phosphate				
UL Rating	1A:10B:C	3A:40B:C		4A:60B:C	6A:80B:C
Temperature Range	-40° to 120° F (-40° to 48° C)				
Discharge Time - Seconds	9.5	14.5		18.1	29.7
Discharge Range - ft (m)	<10 (<3)				
Operating Pressure - psi (bar)	195 (13.45)				
Mounting Type (Standard)	Vehicle Bracket	Wall Hook	Vehicle Bracket	Wall Hook	
UL Approved	Yes	Yes		Yes	Yes
USCG Approved	Yes	No	Yes with Bracket	Use Heavy Duty Marine / Vehicle Bracket (Part #700228)	Use Heavy Duty Marine / Vehicle Bracket (Part #700230)
Height - in (mm)	14.96 (380)	16.93 (430)	17.13 (435)	18.31 (465)	22.44 (570)
Width - in (mm)	4.53 (115)	8.66 (220)	8.66 (220)	9.06 (230)	9.85 (250)
Depth - in (mm)	3.94 (100)	4.84 (123)	5.32 (135)	6.00 (153)	7.20 (183)
Cylinder Diameter - in (mm)	3.38 (86)	4.72 (120)	4.72 (120)	5.9 (150)	7.09 (180)
Shipping Weight - lbs (kgs)	5.07 (2.3)	10.4 (4.7)	10.4 (4.7)	16.8 (7.6)	32.5 (14.7)
Wall Hook Included	No	Yes	No	Yes	Yes
Vehicle Bracket Included	Yes	No	Yes	Optional	Optional
Box Dimensions - in (mm)	4.72 x 4.72 x 15.94 (120 x 120 x 405)	8.86 x 5.12 x 18.11 (225 x 130 x 460)	8.86 x 5.71 x 18.11 (225 x 145 x 460)	7.87 x 6.30 x 19.10 (200 x 160 x 485)	7.48 x 7.48 x 23.23 (190 x 190 x 590)
Extinguishers Per Pallet (Boxed)	200	86	86	72	50
Pallet Size - in (mm)	45.3 x 45.3 x 16 (1150 x 1150 x 1120)	45.3 x 45.3 x 46.3 (1150 x 1150 x 1175)	45.3 x 45.3 x 46.3 (1150 x 1150 x 1175)	43.3 x 43.3 x 44.1 (1100 x 1100 x 1120)	46.5 x 39.0 x 43.1 (1180 x 990 x 1110)

MOUNTING BRACKETS AND WALL HOOKS


- ▶ 2.5 lb and 5.5 lb (VM) models include vehicle mounting bracket.
- ▶ 5.5 lb (WH) model includes wall hook, ring, and hose strap.
- ▶ 10 lb and 20 lb (WH) models include wall hook, ring, and hose strap (vehicle mounting bracket optional).

OPTIONAL HEAVY-DUTY MARINE / VEHICLE BRACKETS ARE ALSO AVAILABLE FOR 10 AND 20 LB MODELS.

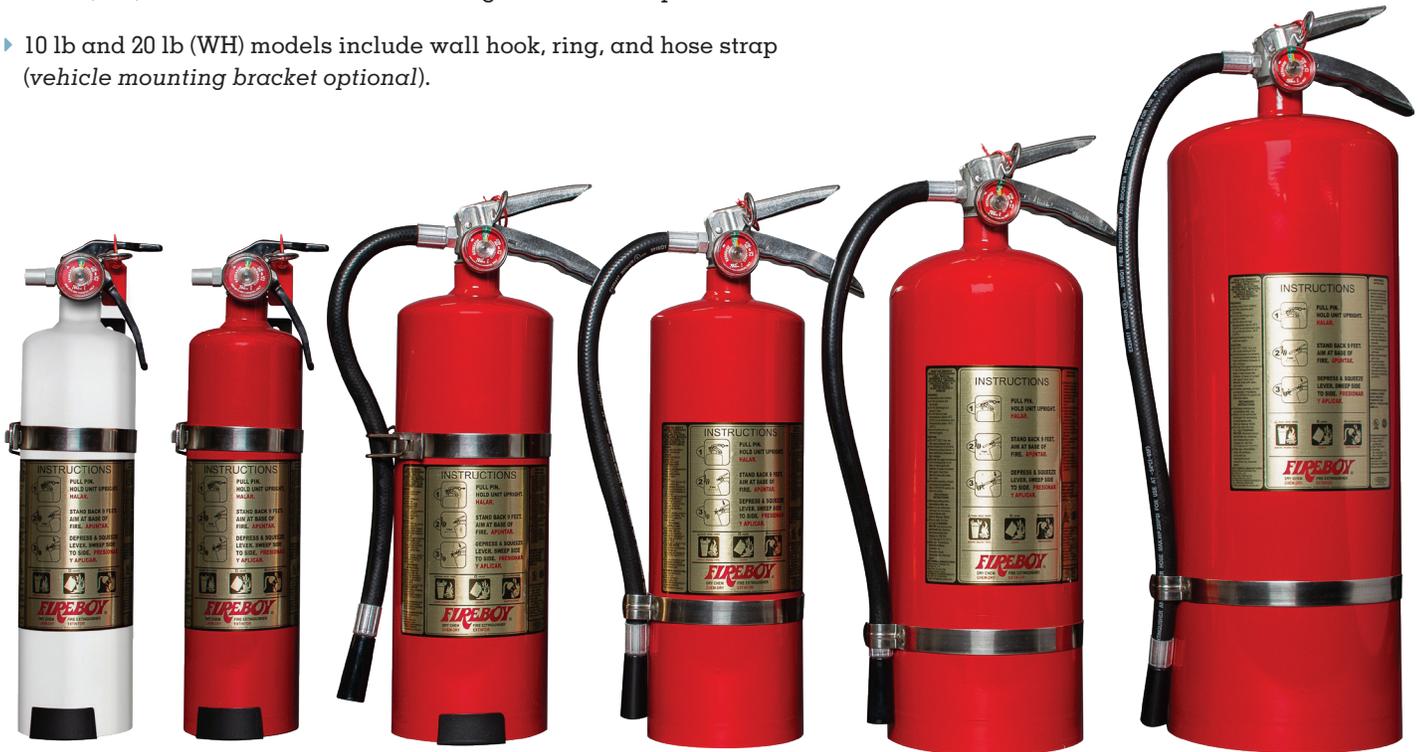

WALL HOOK RING

Standard with 5.5, 10, and 20 lb models.

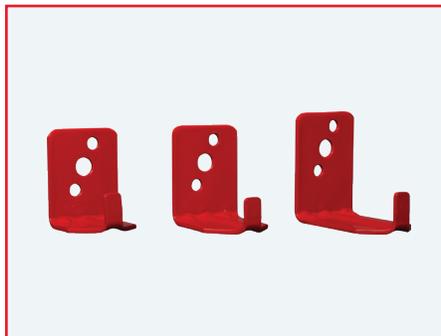

WALL HOOK

Standard with 10 and 20 lb models. Also included with 5.5 lb (WH) model.



MARINE / VEHICLE BRACKET

Standard with 2.5 and 5.5 lb (VM) models. OPTIONAL heavy duty marine / vehicle brackets for 10 and 20 lb models.

ON BOARD, ON GUARD™

PORTABLE EXTINGUISHERS

BC RATED EXTINGUISHERS



HALOTRON CLEAN AGENT EXTINGUISHERS

Halotron clean agent BC rated extinguishers are available in 5 and 11 lb models. An OPTIONAL heavy-duty marine / vehicle bracket is available.



MARINE / VEHICLE BRACKET FOR 11 LB MODEL

HALOTRON EXTINGUISHER SPECIFICATIONS		
F-X PART NUMBER	70551	71100
Agent Capacity - lbs (kgs)	5 (2.27)	11 (5)
UL/ULC Rating	5B:C	1A:10B:C
Temperature Range	-40° to 120°F (-40° to 49°C)	
Discharge Time - Seconds	9	9
Discharge Range - ft (m)	9-15 (2.7-4.5)	9-15 (2.7-4.5)
Operating Pressure - psi (bar)	100 (6.89)	100 (6.89)
USCG Approval with Optional Marine Bracket	Type B:C Size I (Included)	Type B:C Size I (Part # 700228)
Shipping Weight - lbs (kgs)	9.5 (4.3)	21.25 (9.6)
Height - in (cm)	16.38 (41.6)	17.5 (44.5)
Width - in (cm)	7.25 (18.5)	8.63 (21.9)
Diameter - in (cm)	4.25 (10.8)	7 (17.8)



LISTED

FIREBOY - XINTEX
A Darley Company

fireboy-xintex.com



Fireboy-Xintex is an ISO 9001 Certified QMS



Fireboy-Xintex LLC 616.735.9380
A Darley Company
O-379 Lake Michigan Drive NW
Grand Rapids, MI 49534

Fireboy-Xintex UK Operations Limited +44 (0) 845 389 9462
10 Holton Road / Holton Heath Trading Park, Poole
Dorset BH166LT / United Kingdom